

Specification 规格:

Electrical 电气规格:

Voltage Rating 电压额定值: 150 V AC
 Current Rating 电流额定值: 1.5 Amp
 Contact Resistance 接触电阻值: 30mΩ Max.
 Insulation Resistance 绝缘电阻值: 500MΩ Min.
 Dielectric Strength 电介质强度: 1000 VAC, 1 Min.

Material 物料规格:

Housing Material 塑胶外壳: High Temp Nylon UL94V-0 or
 Glass Filled Polyester UL94V-0,
 Black

Contact Material 端子材料:

Spring Wire 圆针: Phosphor Bronze $\phi 0.45\text{mm}$

Plating 电镀规格:


Contact Area: Gold Plating over Nickel
 Tails: Gold Plating over Nickel

Operating Life 使用寿命: 1000 Cycles Min.

Environmental 环境的:

Storage Temperature 储存温度: -10°C to $+70^{\circ}\text{C}$
 Operation Temperature 使用温度: -40°C to $+85^{\circ}\text{C}$

Ordering Grid




No. of Positions/
 Positions Loaded
 44 = 4/4

RECOMMENDED PCB LAYOUT
 AS VIEWED FROM COMPONENT SIDE

Request Samples and Quotation

Insulator Material
N = High Temp Nylon (Standard)
 P = Glass Filled Polyester

Contact Plating
2 = 6 μ " Gold (Standard)
 4 = 30 μ " Gold
 5 = 50 μ " Gold



Part Number		Product Description	
MJ3220 - 4 Position		Modular Jack Connector, 4 Position, Category 3,	
Drawing Date		Right Angle Through Hole, Low Profile, Standard Latch	
13th May 2010			
By	PKN	Tolerances (Except as Noted)	Units:
Detail	Drawing Release	Length	Metric (mm)
Revision	A	$X.X \pm 0.25$	
Date	13/05/10	$X.XX \pm 0.15$	
		$X.XXX \pm 0.075$	
		Angle	
		$\pm 5^{\circ}$	This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT). This drawing must not be copied or disclosed without written consent. E & OE



Not to Scale	Drawn By PKN	Sheet No. 1/2
--------------	--------------	---------------


1. Packing Material 包材 - PVC Tray 1 PC

Quantity 數量 - 1*140=140 PCS

Tray: Body and Cover 真空盒上下蓋各 - 1PCS Each



Tracing Label 流程單編號標籤 - 1 PCS

Lead Free Label 無鉛製程標籤 - 1PCS

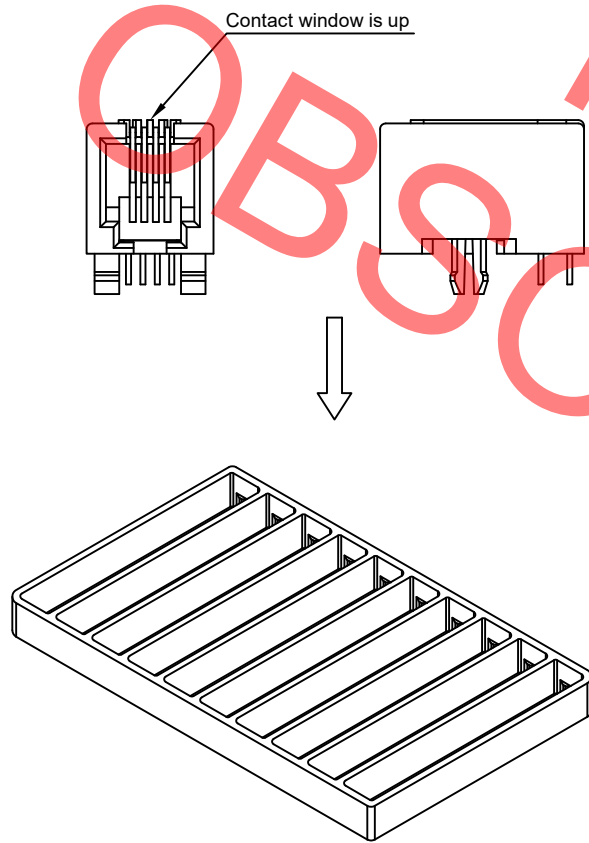

2. Packing Material 包材 - Carton 1 PC

Quantity 數量 - 140*42=5880 PCS

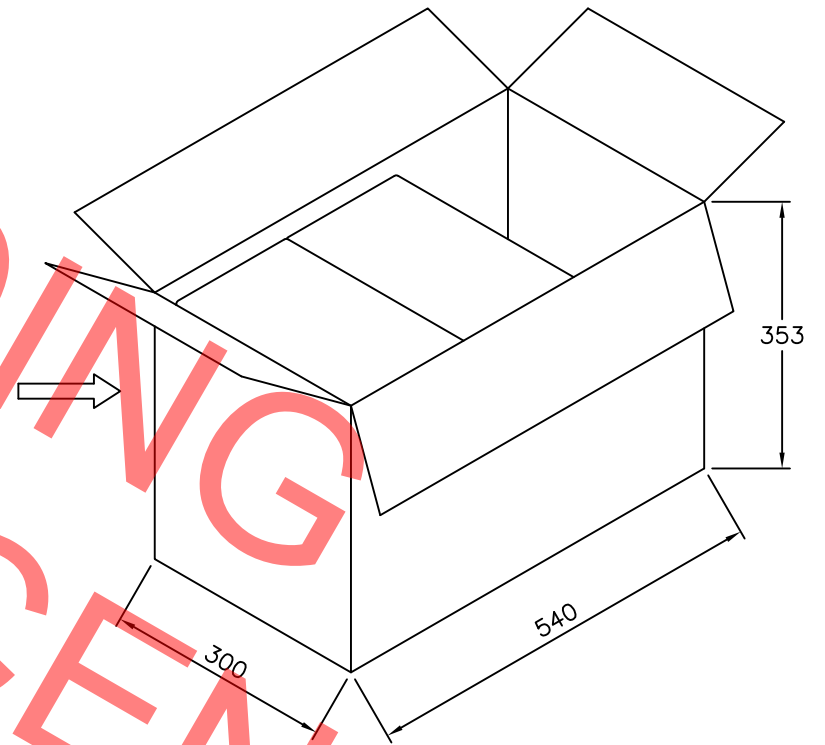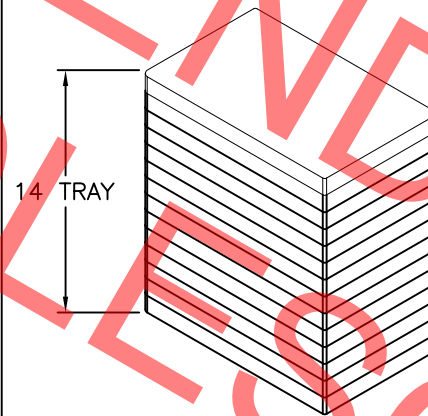

Part Number 零部件料号	Net Weight 淨重	Gross Weight 毛重	Q'TY 數量
MJ3220-44-X-X	13Kg	17±0.3Kg	5880

Part Number MJ3220 - 4 Position		Product Description Modular Jack Connector, 4 Position, Category 3, Right Angle Through Hole, Low Profile, Standard Latch	
Drawing Date 13th May 2010			
By PKN	Drawing Release	Tolerances (Except as Noted) Length	Units: Metric (mm)
Detail A	Date 13/05/10	Angle	3rd Angle Projection
Revision Date			



This drawing is confidential and copyright of Global Connector Technology, Ltd (GCT).
This drawing must not be copied or disclosed without written consent. E & OE



Not to Scale | Drawn By PKN | Sheet No. 1/2